



ADJUSTABLE GROOVY SCUPPER GEAR


Step 1

Put the Slide bolt Weldment (3) on the Upright Assembly (2), add Washer (4) and Wing Nut (5). Leave them loose and put piece in Groovy Extrusion (1). Slide the Axel (2) in Groovy Extrusion (1).




Step 2

Add 1st D Clip (8) between the Extrusion (1) and wheel (6). Place the 2nd D Clip (8) in to outside hole of Axel (10).

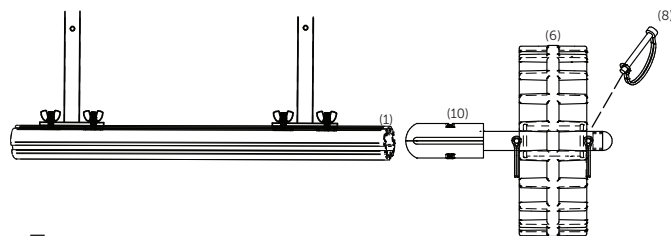


Step 3

Insert D Clip (8) through Bumper (7) to desire location.



Step 4

When in use with your kayak, pass the D Clip (8) through the pin hole to secure the kayak to the Adjustable Scupper Gear..

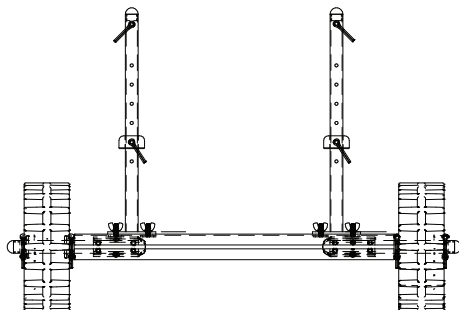


PARTS LIST

1. Groovy Extrusion - 1
2. Upright Assembly - 2
3. 1/4 - 20 Slide Bolt Weldment - 4
4. Lockwasher .25 - 4
5. Wing Nut .25 x 20 - 4
6. Wheel Assembly - 2
7. Bumper - 2
8. Wire D Clip .25 - 8
9. Bungee Cord - 1
10. Axel - 2

To install the Bungee Cord (9) properly, you will have to follow the next steps:

Step 1

First slide the Coupler on to the Bungee Cord.

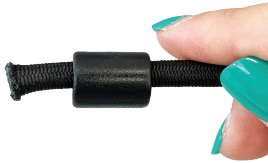

Step 2

Insert the bottom of the hook to the Bungee Cord, slide Coupler over bottom of hook, push to lock in place.



Step 3

Hook the Bungee Cord to one of the inside D Clips next to the wheel.



Step 4

Cut the Bungee cord to desire tension length.

Repeat process with the other side of the Bungee cord.